


Patent Abstracts of Japan

TITLE : BATTERY CHARGING CONTROL AND
DIAGNOSTIC APPARATUS FOR CAR

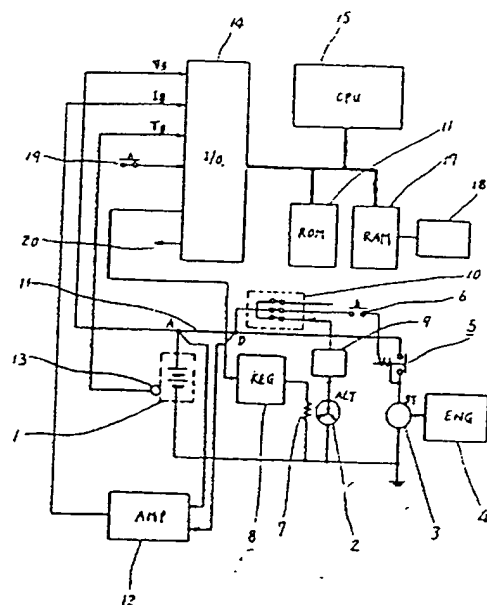

CONSTITUTION: Means 11, 12 detecting the terminal voltage and charge/discharge current of a battery 1 are provided and, during the start of an engine or immediately before the start thereof, the change relation between the discharge quantity and terminal voltage of the battery 1 due to the electric load connected to the battery 1 is calculated and function for estimating and diagnosing life or correcting function of charging control is performed from said relation. Herein, in a main technique of charging control, relational expression of charge quantity QC and discharge quantity QDC is set to $QC=aQDC+b$ corresponding to driving history between $a=0.5\sim1.5$, $b=10\sim70\text{Ah/km}$ and feedback from a controller 8 to an alternator 2 is performed to carry out the stabilizing control of the battery.

COPYRIGHT: (C)1988,JPO&Japio